




# Plastic Tracks and Guides for Sliding Wood Doors

## SLIDING DOOR TRACK

- For 1/8" to 3/4" wood doors
- 4' to 12' lengths available

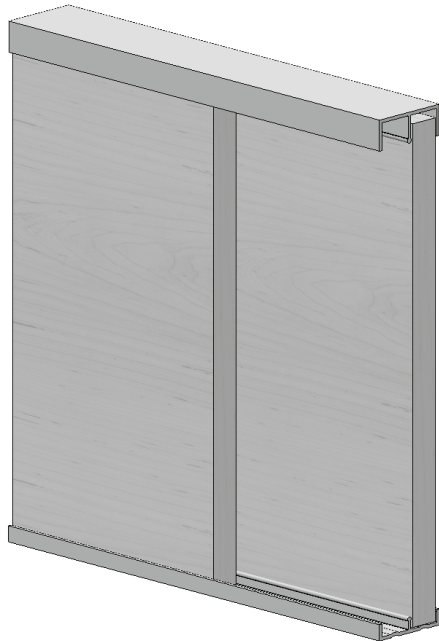

**Complete Assembly Example**  
(P2419 shown)

### Applications

Provides a smooth, durable track system for sliding wood doors.

**Mounting:** Recessed or Surface


**Material:** Solid Plastic or Molded Plastic Fiber

### Finishes:


Neutral (FIBRE), Tan (TAN), Gray (GRAY), Walnut (WAL): Long-lasting solid plastic or molded plastic fiber

### Features:

- Installs quickly and easily with nails or glue
- Allows door to slide quietly and easily
- Can be mounted on surface or recessed
- Made in the USA
- Available from open stock




**Recessed  
Installation**




**Surface Mount  
Installation**

## Plastic Tracks and Guides – STANDARD PACKS

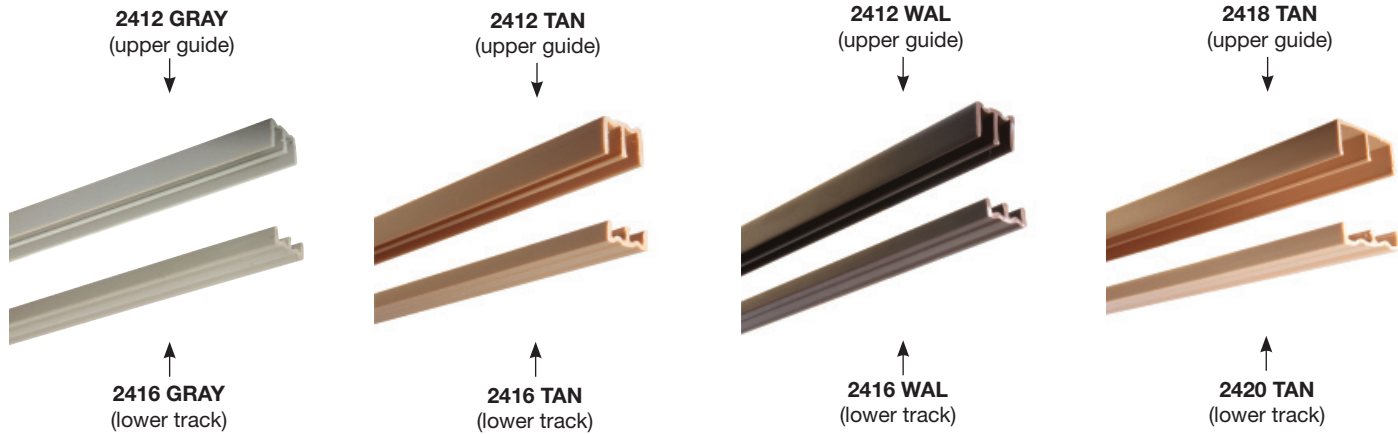

Standard Pack (1 lower track OR 1 upper guide/carton)								
Description	Door Size	Width	Height	Length	Weight	Gray (GRAY)	Tan (TAN)	Walnut (WAL)
Plastic Upper Guide	1/4"	27/32"	9/16"	144"	6.25 lbs./100 ft.	2412 GRAY 144	2412 TAN 144	2412 WAL 144
Plastic Lower Track	1/4"	27/32"	5/16"	144"	5.0 lbs./100 ft.	2416 GRAY 144	2416 TAN 144	2416 WAL 144
Plastic Upper Guide	3/4"	1-15/16"	3/4"	144"	15.28 lbs./100 ft.	–	2418 TAN 144	–
Plastic Lower Track	3/4"	1-15/16"	3/8"	144"	11.17 lbs./100 ft.	–	2420 TAN 144	–

## Fiber Track and Nylon Glides

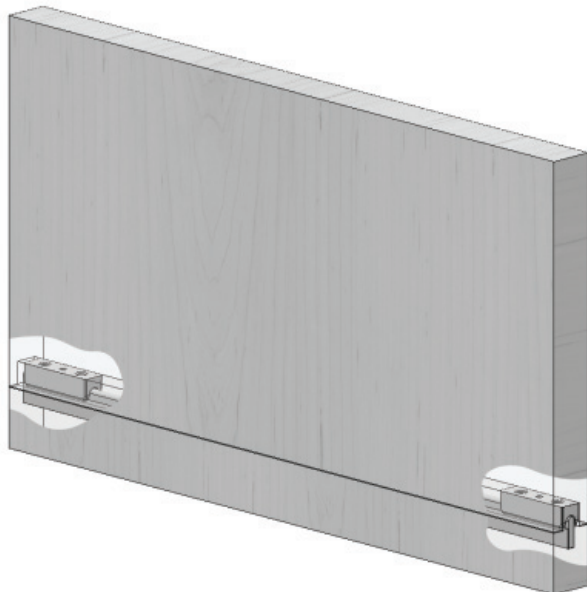

2401 FIBRE 72 (Fiber Lower Track) + 2407 Nylon Glide




2406 Nylon Glide



2407 Nylon Glide

Standard Pack (50/box)		
Size	Weight	Nylon
1/4" W x 1" L	0.22 lbs./box	2406 Nylon
3/8" W x 1-3/8" L	0.67 lbs./box	2407 Nylon



2401 FIBRE 72 (Fiber Lower Track)

Standard Pack (1/carton)					
Door Size	Width	Height	Length	Weight	Part #
1/4" - 3/4"	1/8"	1/2"	72"	3.40 lbs./100 ft.	2401 FIBRE 72


## Plastic Tracks and Guides – PACKAGED ASSEMBLIES




**P2413 TAN**



**P2413 WH**




**P2417 TAN**



**P2417 WAL**



**P2417 WH**



**P2421 TAN**



**P2421 WH**




**P2419 TAN**




**P2419 WH**


Packaged Assemblies (10 sets/carton. 1 upper guide + 1 lower track/set.)						
Door Size	Width	Height	Length	Tan (TAN)	Walnut (WAL)	White (WH)
1/8"	19/32"	9/32"	48"	P2413 TAN 48	–	P2413 WH 48
1/8"	19/32"	9/32"	60"	P2413 TAN 60	–	P2413 WH 60
1/8"	19/32"	9/32"	72"	P2413 TAN 72	–	P2413 WH 72
1/4"	27/32"	5/16"	48"	P2417 TAN 48	P2417 WAL 48	P2417 WH 48
1/4"	27/32"	5/16"	60"	P2417 TAN 60	P2417 WAL 60	P2417 WH 60
1/4"	27/32"	5/16"	72"	P2417 TAN 72	P2417 WAL 72	P2417 WH 72
1/2"	1-3/8"	9/32"	48"	P2421 TAN 48	–	P2421 WH 48
1/2"	1-3/8"	9/32"	60"	P2421 TAN 60	–	P2421 WH 60
1/2"	1-3/8"	9/32"	72"	P2421 TAN 72	–	P2421 WH 72
3/4"	1-15/16"	3/4"	48"	P2419 TAN 48	–	P2419 WH 48
3/4"	1-15/16"	3/4"	60"	P2419 TAN 60	–	P2419 WH 60
3/4"	1-15/16"	3/4"	72"	P2419 WH 72	–	P2419 WH 72




2401 FIBRE




P2413



P2417



P2419



P2421

## 1. PRODUCT NAME

**Plastic Tracks and Guides for Sliding Wood Doors.** Provides a smooth, durable track system for sliding wood doors.

## 2. MANUFACTURER

Knap & Vogt  
2700 Oak Industrial Dr. NE, Grand Rapids, MI USA 49505-6026  
(616) 459-3311 | www.kv.com

## 3. PRODUCT DESCRIPTION

**Basic Use:** Plastic Tracks and Guides for Sliding Doors provide a smooth track system for sliding doors to move back and forth with ease.

### Composition and Materials:

2401 FIBRE: Molded Plastic Fiber

2406, 2407: Nylon

2412, 2416, 2418, 2420, P2413, P2417, P2421, P2419: Plastic

### Sizes:

2401: 1/8" wide x 1/2" high

2412: 27/32" wide x 9/16" high

2416: 27/32" wide x 5/16" high

2418: 1-15/16" wide x 3/4" high

2420: 1-15/16" wide x 3/8" high

**Lengths:** 48", 60", 72", 144" (some lengths not available in all tracks or guides.)

**Finishes:** Neutral (FIBRE), Tan (TAN), Gray (GRAY) and Walnut (WAL), Nylon (NYLON).

## 4. TECHNICAL DATA

**Applicable Standards:** Plastic Tracks and Guides for Sliding Doors are tested to meet or exceed ANSI performance standards as established by BHMA in the Knap & Vogt™ (KV) recommended application.

Results were obtained by laboratory testing in accordance with ANSI/ BHMA A156.9-2003 performance standard. Actual use conditions will typically result in lower load capacity than laboratory conditions.

Representative testing in a fully configured application is the only way to assure proper performance, durability, and safety.

### Environmental Considerations:


**Environment:** Excessive humidity, salts, or other chemical agents can corrode the finish and attack metal or plastic components.

**Fastening:** Inadequate or incorrect fasteners can result in the track or guide pulling loose and causing damage.

**Alignment:** Improper track/guide alignment can result in a sliding door system that is ineffective and unsafe.

## 5. INSTALLATION

1. Lay guide and track in recessed grooves or on surface.
2. Attach with small nails or glue.
3. Height of door should be 7/16" (1.10cm) shorter than distance between top of guide and bottom of track.
4. Place top of door in guide and swing bottom of door into track.

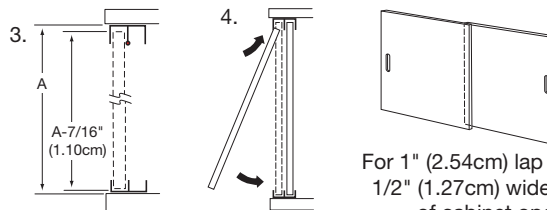

For 1" (2.54cm) lap makedoors  
1/2" (1.27cm) wider than half  
of cabinet opening.

## 6. AVAILABILITY AND COST

**Availability:** Knap & Vogt™ (KV) products are available from stocking distributors and through KV® Representatives worldwide.

**Cost:** Current pricing is available from area KV® Representatives. Please call for the nearest representative: (800) 253-1561.

## 7. WARRANTY

**Limited Lifetime Warranty:** Knap & Vogt offers its standard Limited Lifetime Warranty to the initial purchaser of commercial products. This warranty covers defects in materials and workmanship which occur during normal use, and the remedy is limited to repair or replacement of defective products, at KV's option. Certain types of defects and damage are excluded from warranty coverage, costs and expenses are not covered, and additional restrictions apply. A copy of the Limited Lifetime Warranty, with all warranty details, limitations and disclaimers, is available on the Customer Care Connection location at www.kv.com or from KV Customer Service, 2700 Oak Industrial Drive, Grand Rapids, MI 49505, (800) 253-1561.

## 8. MAINTENANCE

Plastic Tracks and Guides for Sliding Doors require no maintenance. Inspect for proper fit periodically and adjust when necessary. Replace as required or recommended by application.

## 9. TECHNICAL SERVICES

Knap & Vogt™ and area representatives can assist with any application. For further information, or for the name of the representative nearest you, please call Knap & Vogt™ Customer Service: (800) 253-1561 or visit our website at www.kv.com.

## 10. FILING SYSTEMS

Additional product information, data sheets, application sheets, and a full catalog are available upon request from Knap & Vogt™.

**BHMA** Knap & Vogt products follow the  
ANSI testing standards established by BHMA.

Knap & Vogt reserves the right to change product specifications at any time without notice and without incurring responsibility for existing units. This information conforms to editorial style prescribed by The Construction Specifications Institute.