


FlexTape LED Lights

Required Items



FlexTape LED
P/N: LED-FLXTPE

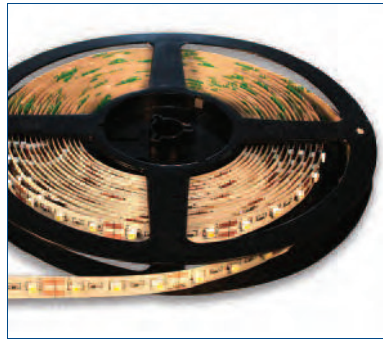

DC Power Supply - 60W
Electronic
P/N: DC-ELT60-CON
Up to 40 feet



Starter Cord (straight feed)
P/N: LED-TPEPKT-2M
Tee Starter Cord (split feed)
P/N: LED-TPEPKT-2M-TEE

Optional Items



Touch On/Off Switch
P/N: TS2-72



Round Switch
P/N: RDSW



Roll Switch
P/N: ROLL SWITCH



Remote Control LED Dimmer
w/ (2) Remote Controls
P/N: LED-DIMRMT-12V8A



Manual Rotary Dimmer
P/N: LED-DIMCON



AMP® Connector
Connector for Starter Cord
P/N: MALE AMP



Tee Connector
P/N: LED-TPELNK-TEE



Right Angle Connector
P/N: LED-TPELNK-CON90



Jumper Cord
with FlexConnect
P/N: LED-TPELNK




Extension Cord
P/N: LED-LINKD

All product dimensions and specifications are subject to change without prior notice.




Required Items

FlexTape LED

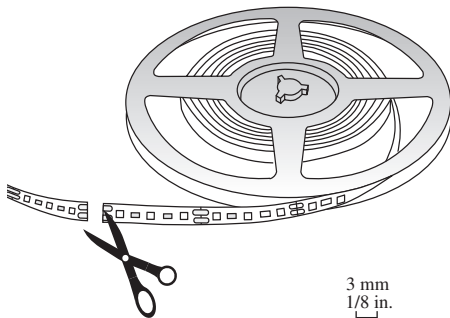

Description	Color Temp/Light	Part No.	E.O.L. Hours	Length
FlexTape Spool 1.5W/ft.	Warm 2700K	LED-FLXTPE-WROLL	25,000	6 m (20 ft.)
	Cool 4800K	LED-FLXTPE-CROLL		
	Daylight 6500K	LED-FLXTPE-DROLL		
	Red	LED-FLXTPE-RROLL		
	Green	LED-FLXTPE-GROLL		
	Blue	LED-FLXTPE-BROLL		

Maximum continuous run is 6 m (20 ft.). Maximum per Power Supply is 12 m (40 ft.).
Mounts with adhesive backing. Cuttable every 76 mm (3 in.).




DC Power Supply - 60W

Electronic. Powers up to 12.1 m (40 ft.) of FlexTape.

Description	Finish Color	Part No.	Dimmable	Hole Size if Needed
DC Power Supply 12VDC 60W	Black	DC-ELT60-CON	Trailing edge (12V side)	See drawing

Maximum run of FlexTape from a single Power Supply is 12 m (40 ft.).
Mounting Block and Power Cord are included with each Power Supply.

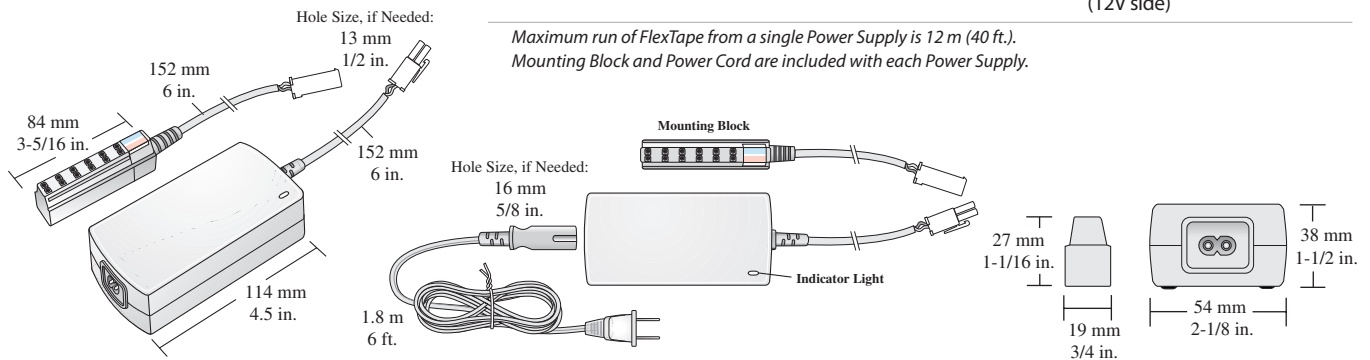


Starter Cord

Straight feed

Description	Length	Finish Color	Part No.	Hole Size if Needed
Starter Cord	2 m (79 in.)	Red/Black	LED-TPEPKT-2M	16 mm (5/8 in.)

Maximum linear run of FlexTape from one Starter Cord is 6 m (20 ft.).

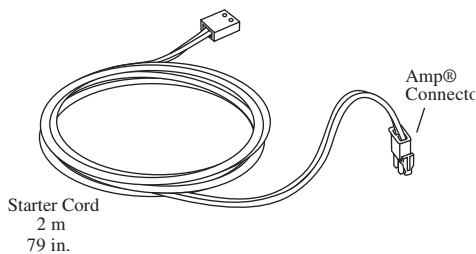


Tee Starter Cord

Split feed

Description	Length	Finish Color	Part No.	Hole Size if Needed
Tee Starter Cord	2 m (79 in.)	Red/Black	LED-TPEPKT-2M-TEE	16 mm (5/8 in.)

Maximum linear run of FlexTape from one Tee Starter Cord is 6 m (20 ft.) per side.
Maximum linear run cannot be deleted from one side of Tee and added to other, i.e. cannot have 12 m (40 ft.) on one side only.

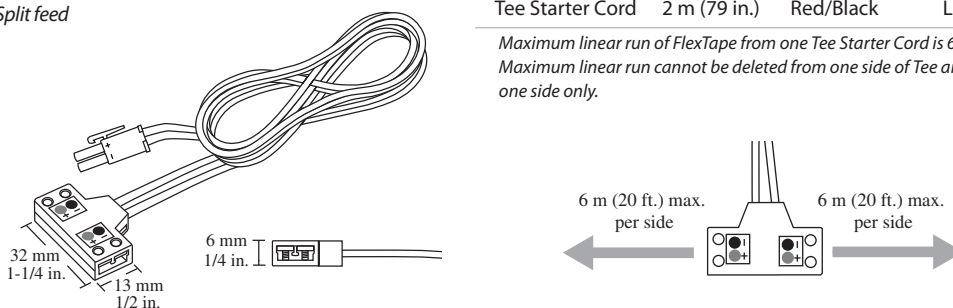

All product dimensions and specifications are subject to change without prior notice.

FlexTape LED


Optional Items

Touch On/Off Switch

Description	Finish Color	Part No.
-------------	--------------	----------

Touch On/Off Switch 200W Two-Step: On-Off	Black touch pad & body	TS2-72
--	------------------------	--------


On/Off Switch touch pad attaches to surface with adhesive backing. Power Supply plugs into On/Off Switch.

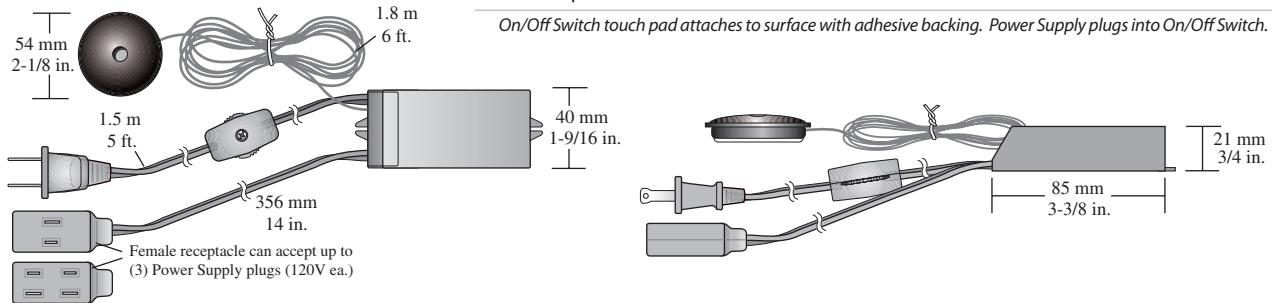

Round Switch - 12V

Description	Finish Color	Part No.	Hole Size Req'd
-------------	--------------	----------	-----------------


Round Switch	1 m (39 in.) cord	White (WH)	RDSW-1M-WH	19 mm (3/4 in.)
		Black (BL)	RDSW-1M-BL	
	2 m (79 in.) cord	White (WH)	RDSW-2M-WH	
		Black (BL)	RDSW-2M-BL	

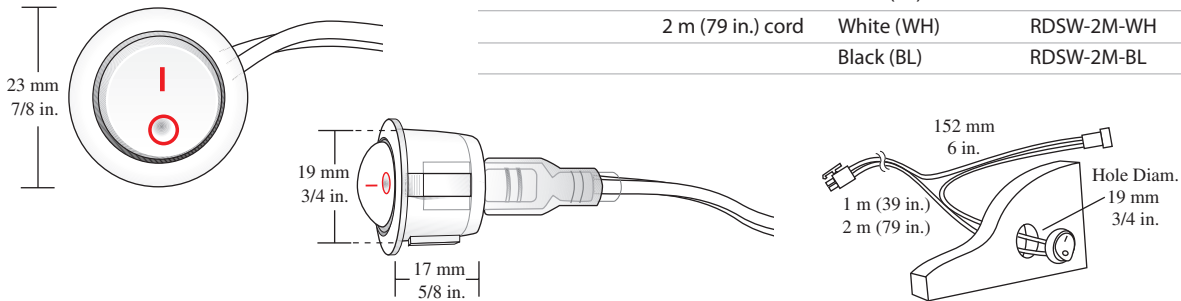

Roll Switch - 120V

Description	Finish Color	Part No.
-------------	--------------	----------

Roll Switch	120V	White	WHITE ROLL SWITCH
		Black	BLACK ROLL SWITCH

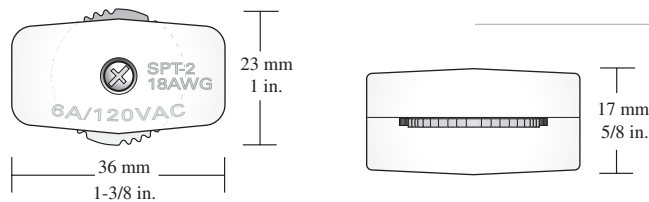


Remote Control LED Dimmer - 12V

w/ 2 Remote Controls

Description	Finish Color	Part No.
-------------	--------------	----------

Remote Control	8 Amps/96 Watts	Black	LED-DIMRMT-12V8A
Remote Control - Universal			LED-DIMRMT-12V8A-U

Both models of the Remote Control LED Dimmer provide on/off power and dim lights from 1%–100%. The standard Remote Control independently controls one specific Dimmer in a room with other Dimmers. The Universal Remote Control (U) controls multiple Dimmers in a room.

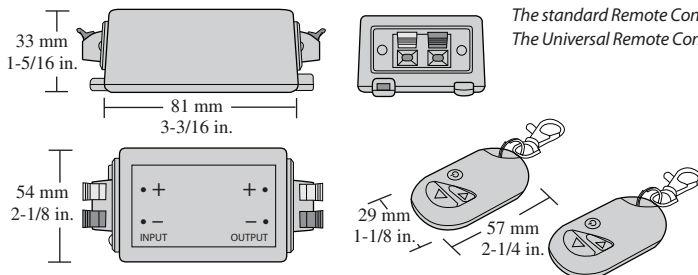


All product dimensions and specifications are subject to change without prior notice.




Optional Items

Manual Rotary Dimmer

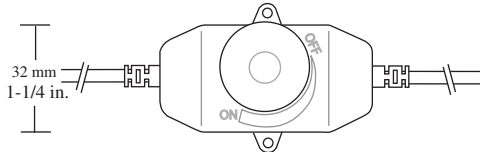


Description	Finish Color	Part No.
Manual Rotary Dimmer 4 Amps/48 Watts	White (WH)	LED-DIMCON-WH
	Black (BL)	LED-DIMCON-BL

The Manual Rotary Dimmer provides on/off power and dims lights from 1%–100%.

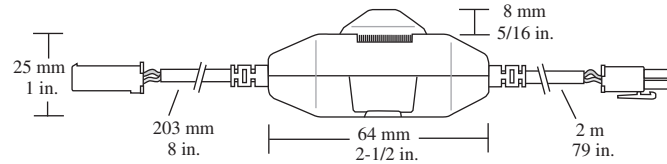


AMP® Connector



Description	Finish Color	Part No.
AMP® Connector for Light Fixture	White	MALE AMP



AMP® Connector is included with each Light Fixture.

Tee Connector




Description	Finish Color	Part No.
Tee Connector	Black	LED-TPELNK-TEE

Right Angle Connector



Description	Finish Color	Part No.
Right Angle Connector	Black	LED-TPELNK-CON90


Jumper Cord



Description	Length	Finish Color	Part No.	Hole Size if Needed
Jumper Cord	15 cm (6 in.)	Red/Black	LED-TPELNK-15	16 mm (5/8 in.)
	25 cm (10 in.)		LED-TPELNK-25	
	60 cm (24 in.)		LED-TPELNK-60	
	120 cm (48 in.)		LED-TPELNK-120	
	180 cm (72 in.)		LED-TPELNK-180	

Positive and negative contacts on FlexTape and FlexConnects should match-up, to maintain proper polarity.

Extension Cord

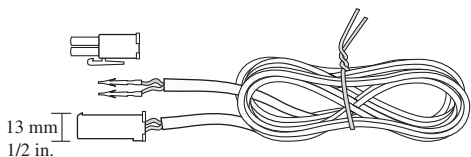

Description	Length	Finish Color	Part No.	Hole Size if Needed
Extension Cord D	15 cm (6 in.)	Red/Black	LED-LINKD-15	13 mm (1/2 in.)
	25 cm (10 in.)		LED-LINKD-25	
	60 cm (24 in.)		LED-LINKD-60	
	120 cm (48 in.)		LED-LINKD-120	
	180 cm (72 in.)		LED-LINKD-180	

Used to extend Power Kit/Starter Cord.

All product dimensions and specifications are subject to change without prior notice.